



GYPSUM WALL BOARD & CEILING



Regular gypsum board (Plasterboard)

It is of ivory color that is nice whether being painted or used as the end color.

Fire resistant gypsum board (Plasterboard)

It is of the pink color processed specially. There are fireproof additive and fiber in the core, which is applicable to be used in the ceiling grid, partition, lift, inner wall of the safe, stair passage and surrounds of the posts and beams etc.

Water/moisture resistant gypsum board (Plasterboard)

It is developed to suit to the indoor environment with strong humidity. The organic hydrophobic adsorbent added in the core and the imported paper surface processed specially improves the waterproof capacity of the plasterboard. It is especially suitable for the ceiling grid and partition of kitchen and bath room.

BEIJING NEW BUILDING MATERIAL(GROUP) CO., LTD.

ADD: Building 4, Interwest Business Center, No.9, South Road Shouti Haidian District, Beijing 100048 China

TEL: 86-10-6879-9866 6879-9879

FAX: 86-10-6879-9887

E-MAIL: davids@bnbm.com.cn dongyan@bnbm.com.cn

Specification


Type	Thickness	Kg/m2	PCS/20' Container approximately
Normal Fire resistant Water/moisture resistant	9mm	7.1	920
	9.5mm	7.6	800
	12mm	8.8	700
	12.7	9.2	620
	15mm	11.6	520
	15.9	12	480

The loading quantity is applicable to the sizes of 1200 × 2400mm and 1200 × 2700mm.


Vinyl Laminated Gypsum Ceiling Tile

We are a leading manufacture of Vinyl Laminated Gypsum Ceiling Tile, which is used in everything from major commercial development and residential housing to simple home improvement projects. We are also specialising in the ceiling suspension system(T-BAR).

Partition System

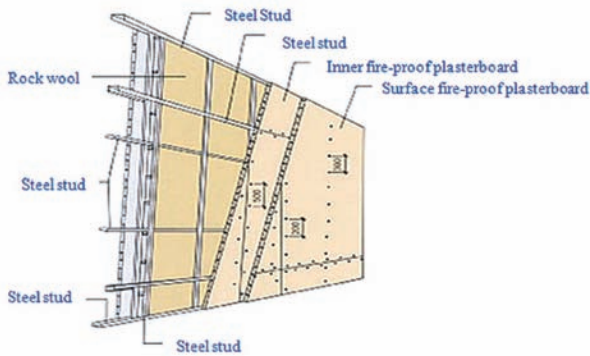

Ceiling System

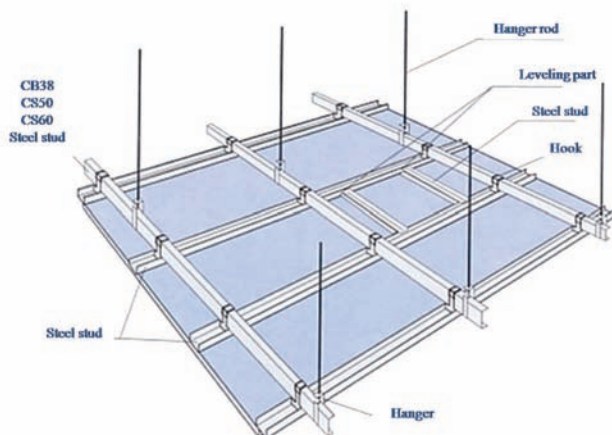


Remark:

BNBM Plasterboard is available to be manufactured according to users' requirement if within the following dimensions: Thickness 7.5-25mm; width 1200-1250mm; length 1800-3660mm.








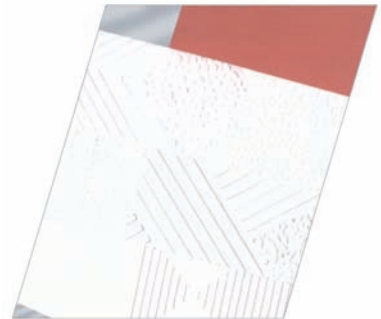




We can produce by both Metric and Imperial systems.

Always be your best choice!

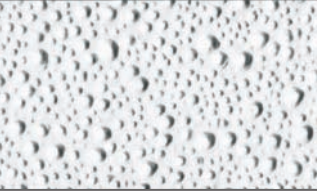
- Safety by incombustibility
- Smart budget by cost-saving
- Fast installation
- Fully automatic capacity
- Customer satisfaction



Item of PVC facing sheet

			
1.#600	2.#862	3.#974	4.#977
			
5.#988	6.#991	7.#993	8.#976
			
9.#999	10.#566	11.#567	12.#568

Functional Gypsum Board

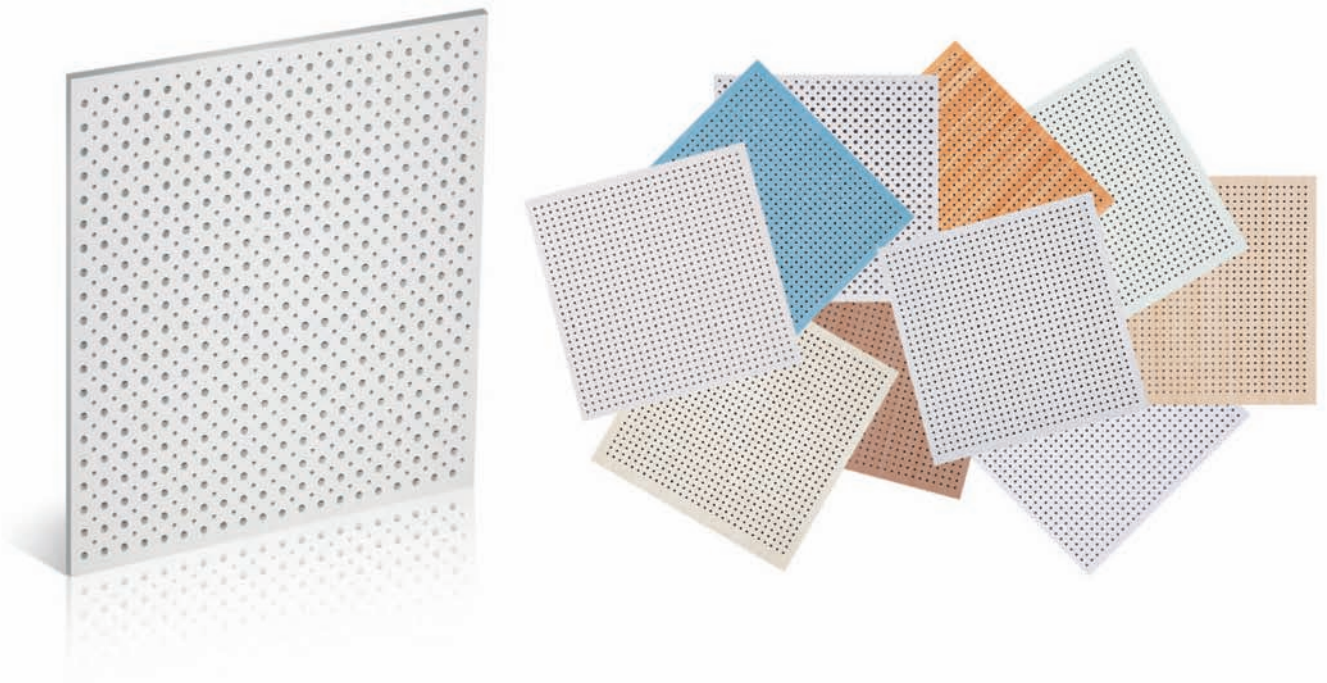

Item of backing

		
1.#PET(SILVER ALUM. FOIL)	2.#PET(RED ALUM. FOIL)	3.#R202~PVC(RED)

Technical data	
Material	Gypsum board
Surface	High-quality vinyl
Backside	PET(W & W/O)
Edge	Square
Thickness	9mm
	7mm
Size	Metric 600 × 600mm
	Imperial 2' × 2'
Actual Size	Metric 595 × 595mm
	Imperial 603 × 603mm
Tolerance	Length/width $\leq \pm 2.0$ mm
	Thickness $\leq \pm 0.5$ mm
Moisture Content	$\leq 2\%$
NRC	0.1-0.3

Fire Retarded, Water Resistant, Environment Friendly, Convenient Construction

Integrated service and products

Ceiling suspension system

Specification	Main Runner	Cross TEE 4'	Cross TEE 2'	Wall Angle
Normal Type	24MM (W) × 38MM (H)	24 MM(W) × 28MM (H)	24MM(W) × 28MM(H)	24MM × 24MM
	24 MM(W) × 33MM (H)	24 MM(W) × 25MM (H)	24MM(W) × 25MM(H)	19MM × 19MM
	24MM (W) × 32MM (H)	24 MM(W) × 25MM (H)	24MM(W) × 25MM(H)	23.5MM × 23.5MM
	14MM (W) × 32MM (H)	14 MM(W) × 32MM (H)	14MM(W) × 32MM(H)	20MM(W) × 14MM(H)
	24MM (W) × 38MM (H)	24 MM(W) × 28MM (H)	24MM(W) × 28MM(H)	23.5MM × 23.5MM
Flat Groove	24MM (W) × 32MM (H)	24 MM(W) × 32MM (H)	24MM(W) × 32MM(H)	23.5MM × 23.5MM